


# 1½" FAT STRAP


## IMPORTANT INSTRUCTIONS

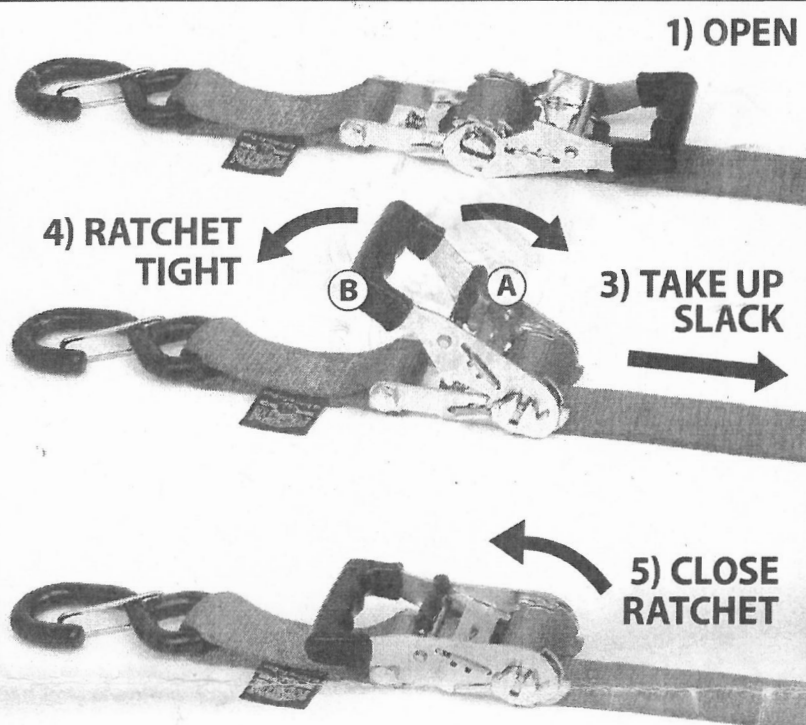

- 1) Pull up on middle quick release lever (A) and hold while fully opening ratchet handle (B) to flat position. Strap should become loose and ratchet spindle will rotate.
- 2) Attach ratchet-end hook to anchor point and fasten sheepskin soft-tie around desired location on the bike.
- 3) Pull excess webbing to take up slack in assembly.
- 4) Pull up on the release (A) and work the ratchet handle (B) back and forth to tighten the strap.
- 5) Push handle (B) down to close the ratchet.

### IMPORTANT RATCHET INFO

For a secure hold, webbing must wrap around the spool 1½ to 2 full rotations

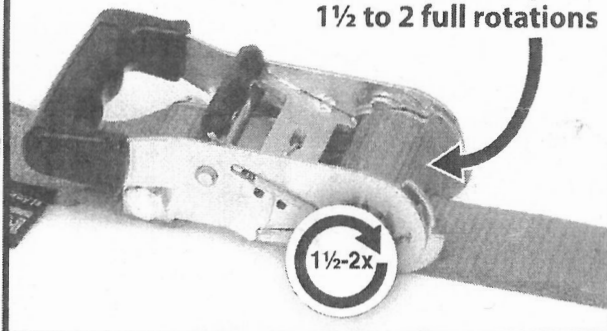

### CAUTION!!

**TO AVOID DAMAGING ANY OBJECTS WHILE STRAPPING, DO NOT OVER TIGHTEN!**

**ALWAYS TAKE UP SLACK BEFORE TIGHTENING RATCHET. TOO MUCH WEBBING ON THE SPOOL WILL CAUSE THE RATCHET TO BIND AND BECOME INOPERABLE.**

### SAFETY INFORMATION

- Do not exceed working load of 1,200lb per each strap.
- Always inspect Webbing, Ratchet and Hooks before each use. Do Not use if Webbing is cut or frayed and dispose of tie-down
- Hooks and Ratchet must be in a straight line with the direction of pull.
- Always check load every 30 minutes and retighten as necessary.
- Webbing must be protected from sharp edges, hot surfaces and chemicals.
- Store out of the sun and water when not in use.

[www.powertye.com](http://www.powertye.com)

• ANAHEIM, CALIFORNIA

