


<Enduro Face Mount Kit for Harley Davidson 39mm Narrow Grde> Installation Guide

parts list

	type	detail	qty
①	Upper Plate		1
②	Lower Plate		R&L 1ea
③	Bolt	5/16-18	4
④	washer		6
⑤	Rubber washer		4
⑥	L Plate		R&L 1ea
⑦	Nylon Nut	5/16-18	4
⑧	Bolt w/washer	M8	2
⑨	Washer (small)		2
⑩	grommet	(installed)	2
⑪	Spacer	(installed)	2
⑫	washer	1/2	4

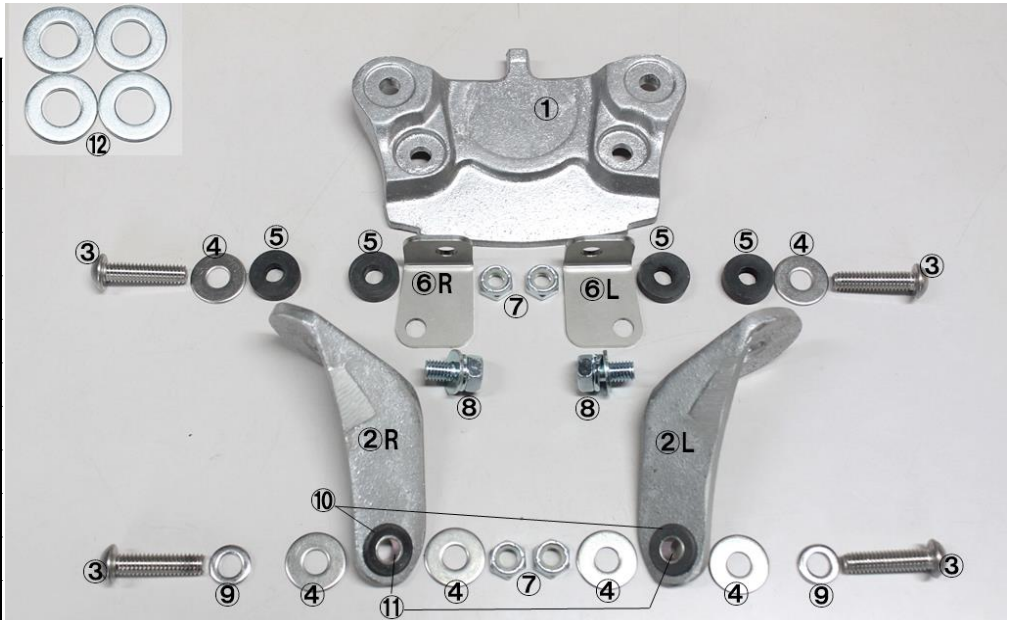

Upper Mount


From Top to bottom : Bolt③ washer④ Rubber washer⑤ Upper Plate① Rubber washer⑤ L Plate⑥ Nylon Nut⑦
Tighten the bolt and nut until the rubber washers are lightly pressed. DO NOT Tighten too much!

Do the same procedure right and left, install this assembly to Enduro face using with Bolt w/washer⑧

Short side of L plate should be on upper Plate.

The hole for ⑧ should be outside.

*If the upper plate is a indicator mount version, You must install indicator in advance

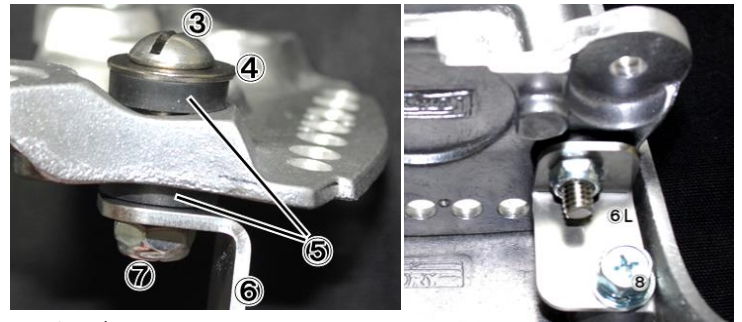


Lower Mount

From Outside to Inside

Bolt③
Washer (small)⑨
Enduro Face
Washer④
Lower Plate② (⑩⑪ installed)
Washer④
Nylon Nut⑦


Tighten the bolt and nut until it gets hard.
(There is a steel spacer ⑪ in grommet ⑩, so you can tighten them up.)

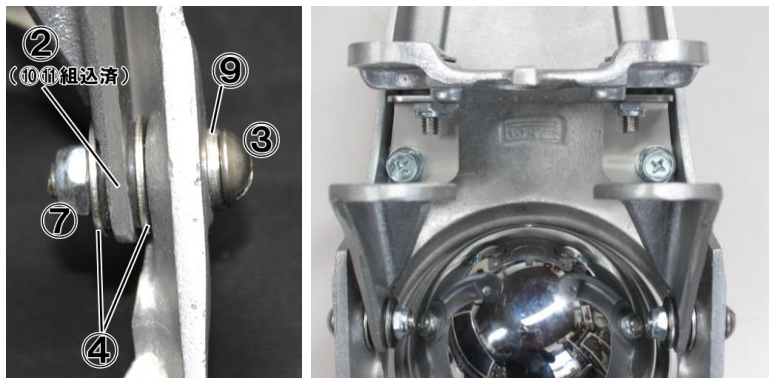

Mounting on Top Bridge

With upper and lower mount on Enduro face, fix the upper mount to the threaded holes which was used for head light visor.

Remove the riser bolt and move the lower plate under the riser hole and slide the riser bolt again. then Keep the lower plate and bottom of riser mount horizontal as picture right. There should be some clearance. Fill that clearance with some washers ⑫ then tighten the riser bolts. Do not tighten the riser bolts in disregard of that clearance. It may cause rubber mount breakage.

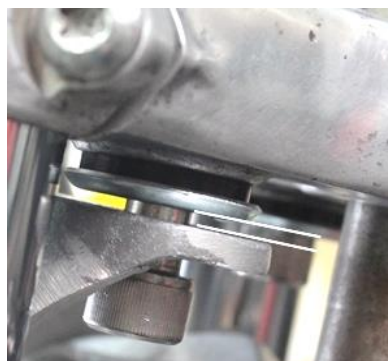

If your top bridge has solid mount hole for riser ('04up sportster etc). Please use optional spacers. In that case, you may need longer riser bolts.

